





push 265

push 350

push 450

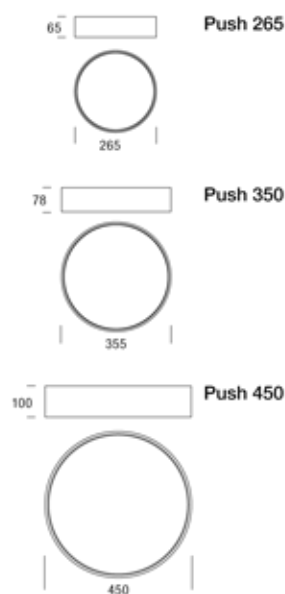

Photometric Data



General		CE	IP20		850°C		300°	LED	w	lum	mA	CFI		
									10	1.300	350	>80		
									15	1.700	500	>80		
									22	2.500	700	>80		
<b>Power</b>														
<b>Push 265</b>		LED		230V	LED	1300lm / 10W	<b>PSH2</b>	<b>A</b>	<b>10</b>	<b>N</b>	*	<b>9</b>	<b>A</b>	**
						1700lm / 15W	<b>PSH2</b>	<b>A</b>	<b>15</b>	<b>N</b>	*	<b>9</b>	<b>A</b>	**
		T5-C		230V	2GX13	22W	<b>PSH2</b>	<b>O</b>	<b>22</b>	*	<b>X</b>	<b>9</b>	<b>A</b>	**
<b>Push 350</b>		LED		230V	LED	1700lm / 15W	<b>PSH3</b>	<b>A</b>	<b>15</b>	<b>N</b>	*	<b>9</b>	<b>A</b>	**
		T5-C		230V	2GX13	55W	<b>PSH3</b>	<b>O</b>	<b>55</b>	*	<b>X</b>	<b>9</b>	<b>A</b>	**
<b>Push 450</b>		LED		230V	LED	2500lm / 22W	<b>PSH4</b>	<b>A</b>	<b>22</b>	<b>N</b>	*	<b>9</b>	<b>A</b>	**
		T5-C		230V	2GX13	60W	<b>PSH4</b>	<b>O</b>	<b>60</b>	*	<b>X</b>	<b>9</b>	<b>A</b>	**
<b>Control</b>		<b>N</b>	No Dimmable				PSH*	*	**	<b>N</b>	*	*	*	**
		<b>E</b>	Dimmable 1-10V				PSH*	*	**	<b>E</b>	*	*	*	**
		<b>D</b>	Dimmable Dali				PSH*	*	**	<b>D</b>	*	*	*	**
<b>Led Colour Temperature</b>		<b>3</b>	3000° K				PSH*	*	**	*	<b>3</b>	*	*	**
		<b>4</b>	4000° K				PSH*	*	**	*	<b>4</b>	*	*	**
<b>Beam Angle</b>		<b>9</b>	Expansive				PSH*	*	**	*	*	<b>9</b>	*	**
<b>Complements</b>		<b>A</b>	Ice Diffuser				PSH*	*	**	*	*	*	<b>A</b>	*
<b>Colours</b>		<b>WS</b>	Satin White				PSH*	*	**	*	*	*	*	<b>WS</b>
		<b>BS</b>	Satin Black				PSH*	*	**	*	*	*	*	<b>BS</b>